TITLE: Extraction, purification and modification of Poly (3-hydroxybutyrate) produced by the fermentation of fatty acids with *Burkholderia cepacia B27.*

Andrés Felipe Ramos[1,2], Armando Espinosa[2], Iván Cabeza[1], Liliana Olmos[3], Daniel Mendez[1], Nubia Moreno – Sarmiento[1]

1. *Biotechnology Institute of the National University of Colombia (IBUN), Bogotá, Colombia.*
2. *Environmental and Chemical Engineering Department of the National University of Colombia. Bogotá, Colombia*
3. *Biopolímeros Industriales LTDA, Bogotá, Colombia.*

Resume:

Poly (3-hydroxybutyrate) or (P3HB) is a thermoplastic polyester of the family of the polyhydroxyalkanoates (PHAs) produced by different kinds of microorganisms under stress conditions. It has very interesting mechanical and physicochemical characteristics that allow it to be used for packaging applications. However, it's necessary to improve some of its weakest characteristics like the high brittleness, the production cost and the narrow processing window. This improvements can be achieved using different extraction, purification and modification technics that result in materials with different physicochemical characteristics and production costs.

In this work different extraction, purification and modification processes were evaluated in order to obtain a polymer with the properties required to make it competitive in the industry. Fatty acids were used as carbon source and the fermentations were made in 5L, 20L and 100L bioreactors. Initially, the polymer must be extracted and separated from the surrounding PHA hyper-productive mutant bacteria *Burkholderia cepacia B27* biomass, using techniques like chemical digestion with SDS and NaOH, centrifugation and solvent precipitation. Then the polymer was purified to remove protein and oil residues from the fermentation, for this the performance of different solvents such as acetic acid, acetone, ethanol and methanol was tested under different operation conditions. Finally, the polymer was modified blending it with other biodegradable polymers like polyethilenglycol and adding different organic fillers to evaluate improvements in the mechanical characteristics. The samples where characterized by TGA and DSC essays and different mechanical tests. The results indicate that the use of organic polar solvents such as methanol and ethanol allow to obtain a colorless, odorless and high purity polymer. Also, use this or other solvents as acetic acid and acetone avoid the use of chloroform in the process, which is an expensive and hazardous solvent that can't be used at the industrial production level.

Biography:

Andrés Felipe Ramos is a chemical engineer from Los Andes University in Bogotá, Colombia and is finishing his MSc in Chemical Engineering in the National University of Colombia. Is member of the Bioprocess and Bioprospecting research group of the national university since January of 2017, the research group has several publications about P3HB production process published in international scientific journals.

Presenting author details
Full name: Andrés Felipe Ramos
Mobile Number: +57 320274412
Linked In account: https://www.linkedin.com/in/andr%C3%A9s-felipe-ramos-farf%C3%A1n-5b9916104/
Category: (Oral presentation)
Date of Birth: 20/05/93

Image:

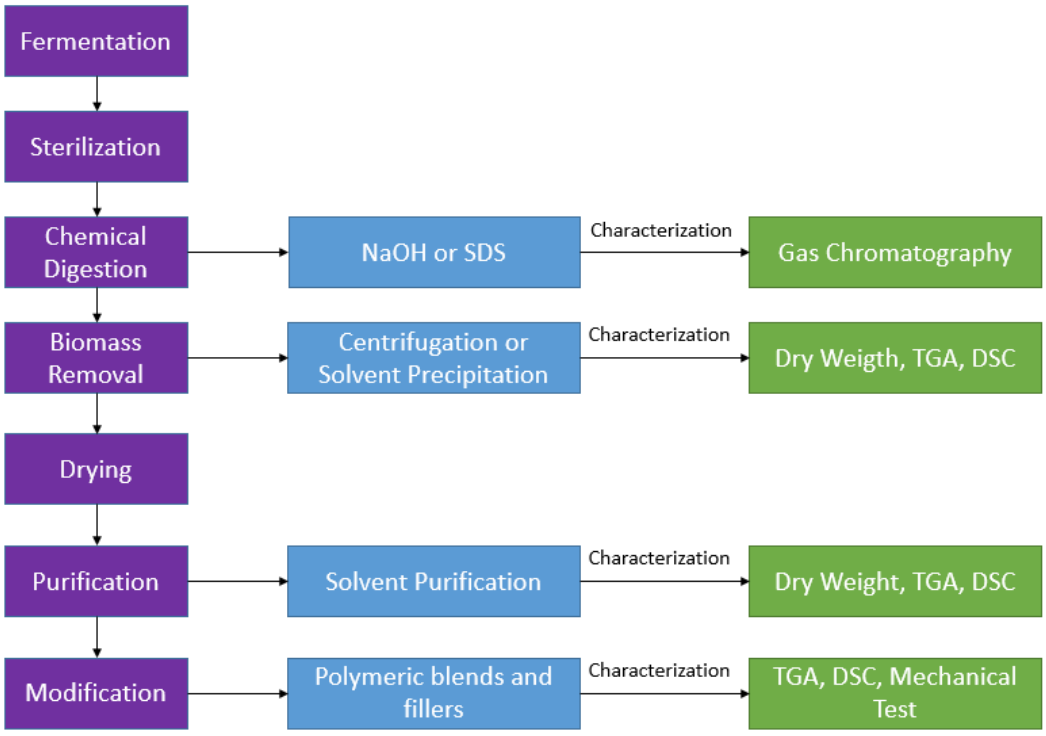


Image 1 – Process Flowchart: The image above shows in purple the main stages of the process for for obtaining the polymer, the evaluated techniques are shown in blue and in green the characterization used for each technique.